




**OPERATION AND CHANGING INSTRUCTIONS
GROUP 2, GROUP 2M and GROUP 1**

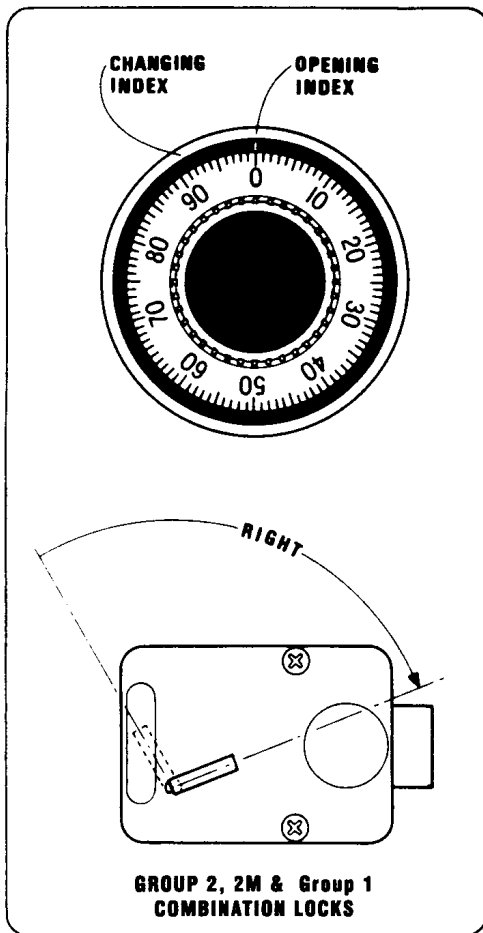

**OPENING THE SAFE USING
THE OPENING INDEX**

If the safe comes with a factory-set combination on 50, turn the dial to the LEFT and pass the number 50 four times and then stop with 50 lined-up on the OPENING Index. Turn RIGHT until the dial stops. The combination lock bolt will retract and the safe may be opened.

To open a safe with a previously-set combination, for example, 10-20-30;

Turn the dial to the LEFT at least four complete times to clear the combination lock to accept the combination.

Using the OPENING Index, turn the dial LEFT and pass the first number of the combination, 10, three times and stop exactly on 10 the fourth time.

Turn the dial to the RIGHT and pass 20 two times and stop exactly on 20 the third time.

Turn the dial LEFT and pass 30 once and stop exactly on 30 the second time.

Turn the dial to the RIGHT. When the lock is open, the dial will not turn to the right any more.

To lock the combination lock, turn the dial four complete turns to the LEFT.